


PTP 850E Microwave Radio

PTP 850E Quick Look

- Capable of 512 QAM with ACM
- Supports 71–76 GHz, 81–86 GHz
- Supports 1+0, 2+0 (XPIC), 1+1 HSB configuration
- Includes built-in frequency scanner to determine the current interference level for each channel

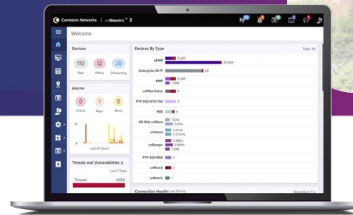

Radio	
Radio	71-76 GHz, 81-86 GHz
Features	BPSK to 512 QAM with hitless ACMB (Adaptive Coding Modulation and Bandwidth)
	1+0, 2+0 (XPIC), 1+1 HSB
	XPIC
	Built-in frequency scanner to determine the current interference level for each channel
	Multiband with PTP 820C, PTP 820C HP, PTP 820S, or third-party microwave radio
	ATPC*
	Adaptive bandwidth notification (EOAM)*
Supports E-stabilizer antenna	

*Roadmap feature

Ethernet		
Interfaces	Port 1: DC port	Port 4: QSFP – 4 x 1/10 GE or 1 x 40 GE traffic interface (QSFP+); option for SFP+ (1 x 10 GE) with adaptor
	Port 2: RJ45, 1 GE/management/PoE	Port 5: SFP, 10 GE (SFP+)
	Port 3: SFP28 cage, 1/2.5 GE multiband port	NOTE: SFP+ and QSFP+ devices must be of industrial grade (-40°C to +85°C)
MTU	9,612 bytes	
Quality of Service	Multiple classification criteria (VLAN ID, p-bits, IPv4 DSCP, IPv6 TC, MPLS EXP)	
	8 CoS queues per port	
	Deep buffering (configurable up to 64 Mbit per queue)	
	WRED	
VLAN	P-bit marking/remarking	
	4K VLAN add/remove/translate	
Network Protocols	MSTP, ERP (ITU-T G.8032)	
	Y.1731 Ethernet OAM	
	Y.1731 Ethernet bandwidth notification (ETH-BN)	

PTP 850EX Millimeter Wave Radio

Management

Management	SNMP
Protocols	SDN support: NETCONF/YANG

Synchronization

Enhanced Ethernet equipment clock (eEEC) Specification (G.8262.1)
PTP telecom boundary clock (T-BC) and time save clock (T-TSC) specification (G.8273.2)
PTP telecom transparent clock (T-TC) specification (G.8273.3)
Enhanced SyncE network limits (G.8261, clause 9.2.1)
Enhanced PTP network limits (G.8271.1)
Ethernet synchronization messaging channel (ESMC) (G.8264, clause 11)
PTP telecom profile for time (full timing support) (G.8275.1)
Precision time protocol (version 2, IEEE1588-2008)

Security

Secured protocols (HTTPS, SNMPV3, SSH, SFTP)
RADIUS authentication and authorization
TACACS+ authentication and authorization (session based)
AES encryption – AES 256

Standard

MEF	Carrier Ethernet 2.0
Supported Ethernet Standards:	10/100/1000base-T/X (IEEE 802.3)
	Optical 10Gbase-LR (IEEE 802.3ae)
	Ethernet VLANs (IEEE 802.3ac)
	Virtual LAN (VLAN, IEEE 802.1Q)
	Class of service (IEEE 802.1p)
	Provider bridges (Q-in-Q – IEEE 802.1ad)
	Link aggregation (IEEE 802.1ax)
	Auto MDI/MDIX for 1000baseT
	RFC 1349: IPv4 TOS
	RFC 2474: IPv4 DSCP
	RFC 2460: IPv6 traffic classes

PTP 850EX Millimeter Wave Radio

Standards Compliance

Radio Spectral Efficiency	EN 302 217-2 Certification ordinance (Japan)
Compliance	EMC: EN 301 489-1, EN 301 489-4, Class A(Europe) FCC 47 CFR, part 15, subpart B, class A(US) ICES-003, Class A(Canada) TEC/SD/DD/EMC-221/05 TEC/SD/DD/EMC-221/05/OCT-16, Class A (India) IEC 61000-4-29
Surge	EN61000-4-5, Class 4 (for PWR and ETH1/PoE ports)
Safety:	EN 60950-1, EN 62368-1, IEC 60950-1, IEC 62368-1, UL60950-1, UL 62368-1, CAN/CSA C22.2 NO 60950-1, CAN/CSA C22.2 NO 62368-1, EN60950-22, IEC 60950-22, UL 60950-22, CAN/CSA C22.2 NO 60950-22
Storage	ETSI EN 300 019-1-1 Class 1.2
Transportation	ETSI EN 300 019-1-2 Class 2
Ingress Protection:	IP67

Technical

Dimensions: Direct Mount (H x W x D)	322 mm x 227/270 mm x 86 mm, 5.5 kg 12.67 in x 8.93/10.62 in x 3.38 in, 12.12 lb
Dimensions: 43 dBi Integrated Antenna (H x W x D)	341 mm x 270/276 mm x 103 mm, 7 kg 13.42 in x 10.62/10.86 in x 4.05 in, 15.43 lb
Pole Diameter Range (for remote mount installation)	8.89 cm – 11.43 cm 3.5 in – 4.5 in
Environmental	-33°C to +55°C (-45°C to +60°C) -27°F to +131°F (-49°F to 140°F)
Standard Input	-48 VDC
DC Input Range	-40.5 to -60 VDC
Redundancy	Power redundancy option by using both a DC power input and a passive PoE injector simultaneously
Power Consumption	Active with XPIC: 73W Active without XPIC: 63W Standby: 51W

Transmit Power (dBm)

Channel Size	62.5 MHz	125 MHz	250 MHz	500 MHz	750 MHz	1000 MHz	1250 MHz	1500 MHz	1750 MHz	2000 MHz
¼ BPSK	–	–	20	20	20	20	20	20	20	20
½ BPSK	–	20	20	20	20	20	20	20	20	20
BPSK	20	20	20	20	20	20	20	20	20	20
4 QAM	20	20	20	20	20	20	20	20	20	20
8 QAM	18	18	18	18	18	18	18	18	18	18
16 QAM	17	17	17	17	17	17	17	17	17	16
32 QAM	17	17	17	17	17	17	17	17	17	16
64 QAM	16	16	16	16	16	16	16	16	16	15
128 QAM	16	16	16	16	16	16	16	16	16	15
256 QAM	15	15	15	15	15	15	15	–	–	–
512 QAM	–	14	14	14	–	–	–	–	–	–

PTP 850EX Millimeter Wave Radio

Receive Sensitivity (dBm @10E-6)										
Channel Size	62.5 MHz	125 MHz	250 MHz	500 MHz	750 MHz	1000 MHz	1250 MHz	1500 MHz	1750 MHz	2000 MHz
¼ BPSK	–	–	-81.8	-78.8	-76.5	-75.8	-74.0	-74.0	-73.0	-73.4
½ BPSK	–	-81.8	-78.8	-75.8	-73.5	-72.8	-71.0	-71.0	-70.0	-70.4
BPSK	-80.0	-78.8	-75.8	-72.8	-70.5	-69.8	-68.0	-68.0	-67.0	-67.4
4 QAM	-78.0	-76.7	-73.7	-70.5	-68.5	-67.6	-66.0	-65.5	-60.0	-59.9
8 QAM	-73.2	-72.1	-69.1	-65.8	-63.5	-62.8	-61.0	-60.5	-60.0	-59.9
16 QAM	-71.3	-70.3	-67.3	-64.3	-62.5	-61.2	-60.0	-59.5	-58.0	-58.6
32 QAM	-70.0	-67.8	-64.8	-60.7	-60.0	-58.6	-57.0	-56.5	-56.0	-55.5
64 QAM	-68.3	-65.5	-61.9	-57.6	-57.5	-55.7	-55.0	-53.5	-53.0	-52.4
128 QAM	-64.1	-63.0	-58.9	-54.7	-54.5	-52.6	-52.0	-50.5	-50.0	-48.0
256 QAM	-61.0	-59.5	-56.0	-50.4	-51.5	-49.8	-48.5	–	–	–
512 QAM	–	-55.4	-52.4	-49.4	–	–	–	–	–	–

Throughput Sensitivity (Mbps)										
Channel Size	62.5 MHz	125 MHz	250 MHz	500 MHz	750 MHz	1000 MHz	1250 MHz	1500 MHz	1750 MHz	2000 MHz
¼ BPSK	37-48	39-51	46-60	92-120	136-176	185-239	231-299	271-351	303-392	323-419
½ BPSK	77-99	81-104	92-120	186-241	271-351	370-480	476-616	557-722	621-804	663-859
BPSK	116-150	163-211	186-241	372-482	557-722	761-985	952-1233	1114-1443	1242-1609	1326-1717
4 QAM	155-201	246-318	373-484	766-992	1115-1444	1524-1974	1905-2468	2232-2892	2487-3222	2652-3436
8 QAM	195-252	328-425	576-746	1150-1489	1673-2167	2287-2962	2859-3703	3349-4339	3733-4836	4128-5347
16 QAM	234-303	421-546	768-994	1533-1986	2232-2892	3050-3951	3813-4939	4467-5787	4979-6450	5505-7131
32 QAM	273-354	505-654	960-1244	1916-2482	2790-3614	3813-4939	4768-6176	5584-7234	6224-8062	6869-8897
64 QAM	313-405	590-764	1153-1494	2301-2980	3348-4337	4575-5927	5721-7410	6697-8675	7453-9655	8241-9882
128 QAM	–	674-873	1346-1743	2684-3476	3907-5061	5339-6916	6675-8646	7804-9882	8691-9882	9882-9940
256 QAM	–	759-983	1538-1993	3068-3975	4416-5784	6101-7904	7612-9861	–	–	–
512 QAM	–	–	1730-2242	3452-4472	–	185-239	231-299	271-351	303-392	323-419

ABOUT CAMBIUM NETWORKS

Cambium Networks enables service providers, enterprises, industrial organizations, and governments to deliver exceptional digital experiences and device connectivity with compelling economics. Our ONE Network platform simplifies management of Cambium Networks' wired and wireless broadband and network edge technologies. Our customers can focus more resources on managing their business rather than the network. We make connectivity that just works.

cambiumnetworks.com