


Cambium Fiber XGS-PON ONU

Seamless Integration of Fiber and Wireless

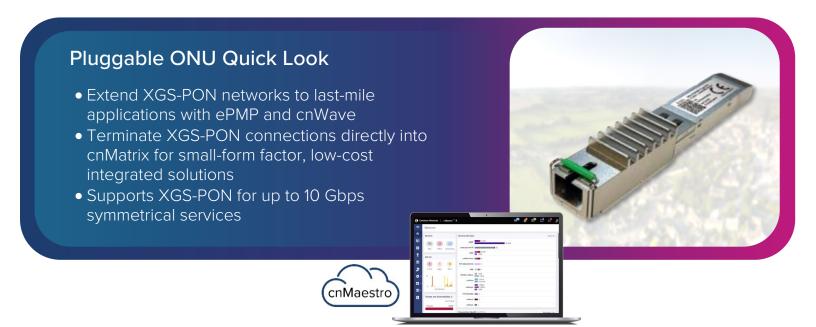

Cambium Fiber emphasizes performance, costeffectiveness, and ease of management. Featuring high-speed XGS-PON technology (as well as GPON and ComboPON), Cambium solutions provide symmetrical 10 Gbps speeds to meet the growing demands of high-speed internet for residential, enterprise, and multi-dwelling unit (MDU) environments.

The Cambium Fiber XGS-PON Pluggable ONU (Optical Network Unit) extends the fiber network into hard-to-reach places or last-mile applications with seamless integration directly into Cambium radios such as ePMP™ 4500/4600 or cnWave™ 60 GHz V5000/V3000.

The ONU plugs into a Cambium radio infrastructure, leveraging the radio's wireless backhaul capabilities to bridge the gap between the fiber network endpoint and the end user location. It's an ideal solution for areas where deploying fiber is impractical or cost prohibitive.

The Pluggable ONU also enables the direct termination of a fiber XGS-PON connection into a cnMatrix™ switch or other third-party switches/routers.

Its compact design eliminates the need for additional external ONUs or converters and results in a small form-factor deployment, reducing space and power requirements, keeping installation costs low while delivering the full capabilities of XGS-PON technology.

Cambium's Fiber portfolio extends this integration with centralized management through cnMaestro™ Network Management for end-to-end visibility, enabling service providers and enterprises to efficiently monitor and troubleshoot their networks. With robust security features and a focus on Quality of Experience (QoE), Cambium ensures a reliable, secure, and optimized user experience for every deployment.




Cambium Fiber XGS-PON Pluggable ONU

Specifications	
Sales Model	SXS00-0A00
Compatibility –	Cambium 8-port and 16-port OLTs
PON	Contact Cambium for 3 rd -party compatibility options
Compatibility –	ePMP 4500
Wireless Radios	ePMP 4600
	Force 400C / Force 425
	cnWave 60 GHz V5000
	cnWave 60 GHz V3000
Compatibility –	cnMatrix
Ethernet Switches/Routers	Contact Cambium Networks for other 3 rd -party compatibility options
Electrical	Hot-pluggable, single +3.3V power supply
	LVTTL burst enable control, active high; LVTTL TX_DIS, TX_Fault, RX_LOS
	LVTTL sleep mode for reduced power consumption
	Power consumption: < 1.5W
Networking	10 Gbps, also supports Ethernet interface HSGMII / 2500BASE-X (2.5 Gbit/s), SGMII/ 1000BASE-X (1 Gbit/s)
	Supports rogue ONU detection
	Wire-speed data transfers for supported packet sizes (64, 512, and 1518 Bytes)
	Supports 4K MAC entries
	Supports jumbo frames up to 9,000 bytes
Optical	XGS-PON single fiber up to 10 Gbps symmetric upstream and downstream
	9.95328Gbps / 1270nm burst-mode transmitter with DFB laser
	9.95328Gbps / 1577nm high sensitivity continuous-mode APD-TIA receiver
	Class: N2
	Max link budget: 31 dB
	Maximum range: 20km
	Receiver overload ≤ -9dBm
	Receiver sensitivity ≥- 28.5 dBm
Mechanical	SFP+ package with SC/APC receptacle
	Media: SMF
Compliance /	Compliant with SFF-8431 and SFF-8472
Regulatory	Compliant with ITU-T G.9807.1 XGS-PON (N1/N2/E1 class)
	Class 1 laser eye safety standard IEC-60825 compliant
	FCC, ICES, EN, IEC, CAN/CSA, ETSI, ANSI/UL, AS/NZS (details in product documentation)
	ROHS/WEEE
Environmental	Temperature: -40 to 55°C (-40 to 131°F)



Cambium Fiber XGS-PON Pluggable ONU


Applications

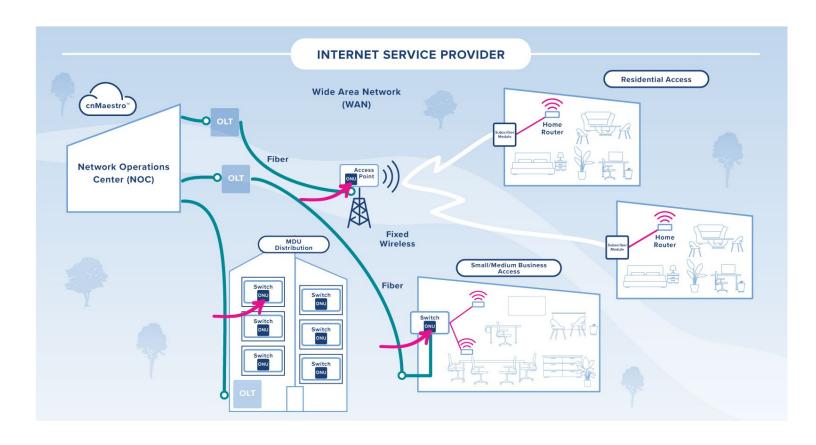



Cambium Fiber XGS-PON Pluggable ONU

Applications

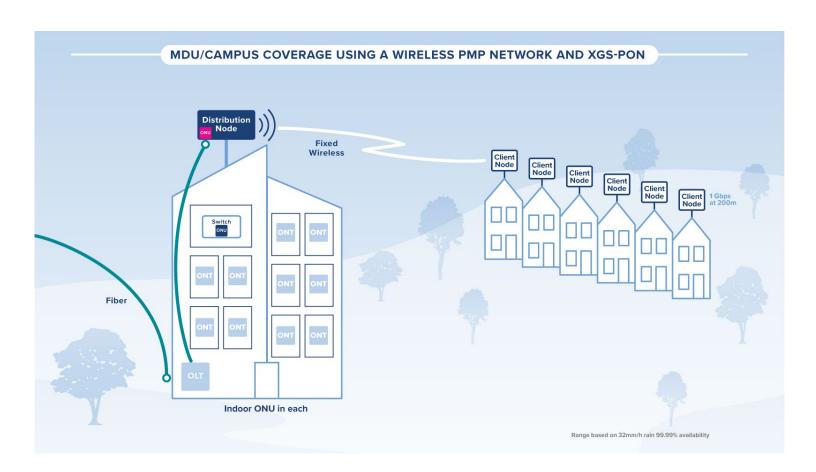

ABOUT CAMBIUM NETWORKS

Cambium Networks enables service providers, enterprises, industrial organizations, and governments to deliver exceptional digital experiences and device connectivity with compelling economics. Our ONE Network platform simplifies management of Cambium Networks' wired and wireless broadband and network edge technologies. Our customers can focus more resources on managing their business rather than the network. We make connectivity that just works.

cambiumnetworks.com

12132024